

Preliminary

new!

Whirlpool Gold® Gas Double Oven Freestanding Range GGG390LX

KEY FEATURES

- TimeSaver™ Plus True Convection
- Cast-Iron Continuous Cooktop Grates
- 5 Burner Cooktop with Fish Burner
- AccuBake® Temperature Management System in Both Ovens



Unparalleled Efficiency in an Easy-to-Clean Package



©Schott Ceran is a Registered Trademark of SCHOTT North America, Inc.



Whirlpool Gold® Gas Double Oven Freestanding Range

GGG390LX

Capacity (cu. ft.) (upper/lower)	2.1/3.9
Oven Control System	Electronic

Cooktop

Continuous Cast-Iron Grates	Yes
5K BTU Burner	2
7.35K Fish Burner	1
10K BTU Burner	1
16K BTU Power™ Burner	1


Oven

Hidden Bake Element	Yes
TimeSaver™ Convection Cooking System	Yes
AccuBake® Temperature Management System	Yes
Rapid Preheat	Yes
Delay Bake	Yes
Oven Hold Warm	Yes
Custom Broil	Upper Oven
Sabbath Mode	Yes
Control Lockout	Yes
Clock & Timer	Yes
Automatic Oven Light	Yes
Racks	1 Upper/2 Lower
Oven Window	EasyView™
Self-Cleaning System	PreciseClean™

Overall Features

Energy Save Mode	Yes
Metal Handle	S
Color Availability*	Q,B,S

* Q-White, B-Black and S-Stainless Steel

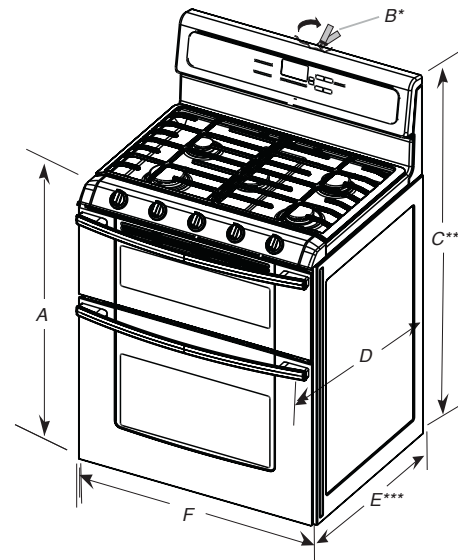

- A. $35\frac{3}{4}'' \pm \frac{1}{8}''$ (90.8 \pm 0.3 cm) cooktop height (minimum) with leveling legs screwed all the way in
- B. Model/serial/rating plates (located behind the control panel)*
- C. $47\frac{1}{8}'' \pm \frac{1}{8}''$ (119.7 \pm 0.3 cm) overall height (minimum) with leveling legs screwed all the way in**
- D. $28\frac{1}{2}'' \pm \frac{1}{4}''$ (72.4 \pm 0.6 cm) depth with handle
- E. $26\frac{1}{8}''$ to $27'' \pm \frac{1}{8}''$ (66.4 \pm 0.3 cm)***
- F. $29\frac{5}{16}'' \pm \frac{1}{16}''$ (76.0 \pm 0.2 cm) width

*Model/serial/rating plates may be rotated up from behind the control panel for viewing from the front of the range.

**Range can be raised approximately 1" (2.5 cm) by adjusting the leveling legs.


***Excludes handle. Dimension given is from wall to front of oven door and will vary based on electrical outlet receptacle installation.

Cabinet Dimensions

Cabinet opening dimensions shown are for 25" (64.0 cm) countertop depth, 24" (61.0 cm) base cabinet depth and 36" (91.4 cm) countertop height.

IMPORTANT: If installing a range hood or microwave hood combination above the range, follow the range hood or microwave hood combination installation instructions for dimensional clearances above the cooktop surface.

Range may be installed with zero clearance to combustible construction at the rear and on the sides below the cooktop.

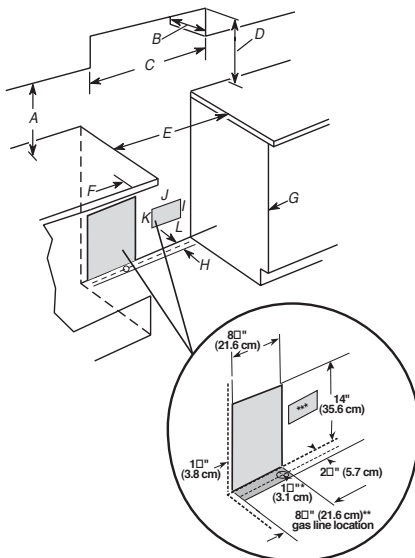

- A. 18" (45.7 cm) upper cabinet to countertop
- B. 13" (33.0 cm) upper cabinet depth
- C. 30" (76.2 cm) min. opening width
- D. For minimum clearance to the top of the cooktop, see NOTE.
- E. 30" (76.2 cm) min. opening width
- F. 3" (7.6 cm) min. clearance from both sides of the range to the side wall or other combustible material.
- G. Cabinet door or hinges should not extend into the cutout.
- H. 3" (7.6 cm) distance from wall
- I. $1\frac{1}{2}''$ (3.8 cm) min. from right side cabinet
- J. 8" (20.3 cm) width
- K. 7" (17.8 cm) min. from floor
- L. 2" (5.1 cm) min. from floor

*Drill on centerline 1" (3.1 cm) from rear wall for gas supply line.

**Gas lines must be installed within the shaded area to ensure proper alignment of this oven with cabinets.

***Electrical plugs must be installed within the shaded area to ensure proper alignment of this oven with cabinets.

NOTE: 24" (61.0 cm) minimum when bottom of wood or metal cabinet is covered by not less than $\frac{1}{4}''$ (0.64 cm) flame retardant millboard covered with not less than No. 28 MSG sheet steel, 0.015" (0.4 mm) stainless steel, 0.024" (0.6 mm) aluminum or 0.020" (0.5 mm) copper.

30" (76.2 cm) minimum clearance between the top of the cooking platform and the bottom of an uncovered wood or metal cabinet.

Dimensions are for planning purposes only. For complete details, see Installation Instructions packed with product. Specifications subject to change without notice.



Whirlpool brand's exclusive 6th Sense™ technology senses and manages what was once beyond your control.